


# DCX 6 M $\varnothing 6$ mm, precious metal brushes, DC motor

Key Data: 0.3/0.56 W, 0.3 mNm, 17300 rpm



DCX

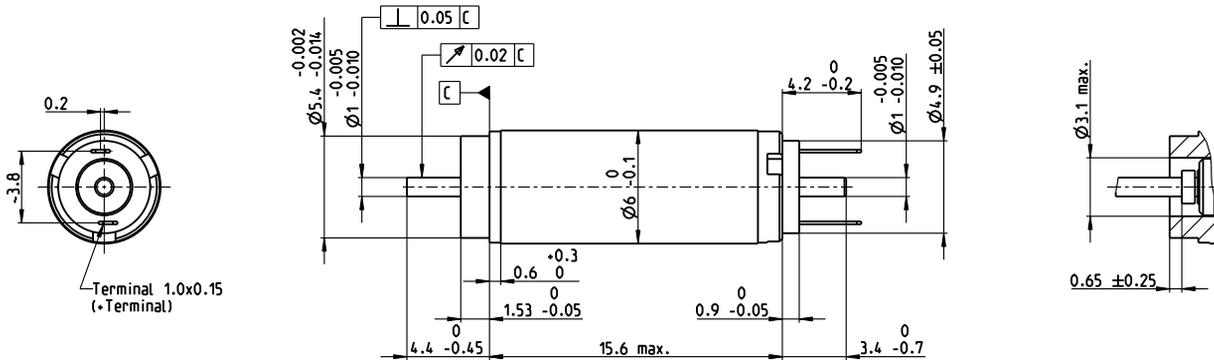

M 5:2

### Motor Data


1_	Nominal voltage	V	1.5	3	4.5	6
2_	No load speed	rpm	17300	17500	17400	17400
3_	No load current	mA	34.1	17.1	11.4	8.54
4_	Nominal speed	rpm	4950	5940	5730	5690
5_	Nominal torque (max. continuous torque)	mNm	0.309	0.332	0.326	0.325
6_	Nominal current (max. continuous current)	A	0.425	0.228	0.149	0.111
7_	Stall torque	mNm	0.453	0.524	0.507	0.503
8_	Stall current	A	0.581	0.336	0.217	0.161
9_	Max. efficiency	%	58	61	60	60
10_	Terminal resistance	$\Omega$	2.58	9.0	20.8	37.2
11_	Terminal inductance	mH	0.008	0.0316	0.0711	0.126
12_	Torque constant	mNm/A	0.779	1.560	2.34	3.12
13_	Speed constant	rpm/V	12300	6130	4090	3060
14_	Speed/torque gradient	rpm/mNm	40600	35100	36300	36600
15_	Mechanical time constant	ms	7.06	6.74	6.81	6.81
16_	Rotor inertia	gcm <sup>2</sup>	0.017	0.0183	0.0179	0.018

### Thermal data

17_	Thermal resistance housing-ambient	K/W	105
18_	Thermal resistance winding-housing	K/W	20
19_	Thermal time constant winding	s	1.71
20_	Thermal time constant motor	s	79
21_	Ambient temperature ball bearings	$^{\circ}$ C	-30...+85
21_	Ambient temperature sleeve bearings	$^{\circ}$ C	-30...+85
22_	Max. winding temperature	$^{\circ}$ C	100

### Operating Range

n [rpm] Winding 4.5 V

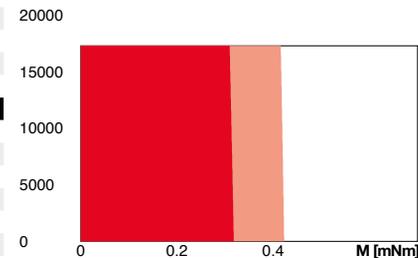

- Continuous operation
- Continuous operation with reduced thermal resistance  $R_{th2}$  50%
- Intermittent operation

### Mechanical data ball bearings

23_	Max. speed	rpm	17 300
24_	Axial play	mm	0..0.1
	Preload	N	0.5
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	8.8
	(static, shaft supported)	N	100
28_	Max. radial load [mm from flange]	N	0.6 [5]

### Mechanical data sleeve bearings

23_	Max. speed	rpm	17 300
24_	Axial play	mm	0.02...0.1
	Preload	N	0
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	10
	(static, shaft supported)	N	100
28_	Max. radial load [mm from flange]	N	0.4 [5]

### maxon Modular System

maxon gear	Stages [opt.]	maxon sensor
331_GPX 6 A	1-5	443_ENX 6 MAG

### Details on catalog page 34

maxon motor control
500_ESCON Module 24/2
500_ESCON 36/2 DC
512_EPOS4 Mod./Comp. 24/1.5

### Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		5
31_	Weight of motor	g	2.4
32_	Typical noise level	dBA	-

### Configuration

Bearing: Sleeve bearings/ball bearings preloaded  
 Commutation: Precious metal brushes  
 Flange front/back: Standard flange  
 Shaft front/back: Length  
 Electric connection: Terminals or cables (encoder always with Flex)