





motor mounting



PLANETARY GEARBOX GPL032P

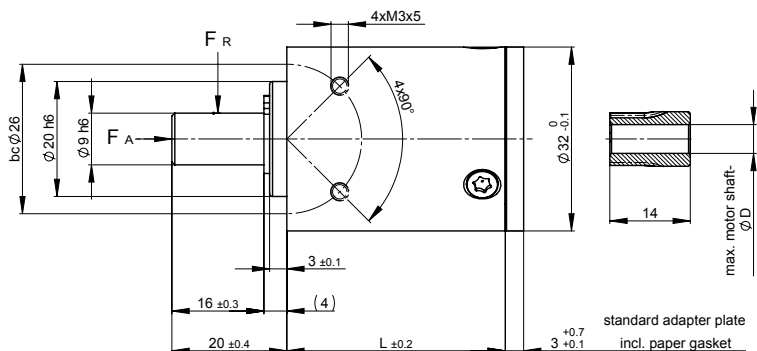

2-STAGE		3-STAGE		4-STAGE	
Ratio i:1	Max. motor shaft-ØD	Ratio i:1	Max. motor shaft-ØD	Ratio i:1	
				Max. motor shaft-ØD	
				Ratio i:1	
				Max. motor shaft-ØD	
				Ratio i:1	
				256	6
				288	6
				332.8	6
		64	6	324	6
		72	6	400	6
16	6	81	5	512	6
18	5	100	6	625	6
20.8	4	144	5	800	6
25	3	200	3	1024	6
32	2	256	2	1600	3
Rated torque continuous		Type Standard		Nm	
Rated torque intermittent		Type Standard		Nm	
Rated torque continuous		Type V		Nm	
Rated torque intermittent		Type V		Nm	
Max. efficiency at rated torque				%	
Average backlash at no load		Type Standard	Type V	arcmin ≤	
Weight without adapter plate				g	
Dimension L				mm	
Dimension A				mm	
Dimension B				mm	
Max. radial load		F _R	8 mm from shaft end	N	
Max. axial load		F _A		N	
Max. continuous rated speed at drive				min ⁻¹	
Max. intermittent rated speed at drive				min ⁻¹	
Temperature range		Type Standard		°C	
Temperature range		Type V		°C	

Standard scope of delivery Gearbox lubricated for duration of service life, dust-proof package, motor pinion, mounting screws, paper gasket and assembly instructions (adapter plate optional).

Customized versions also available for small quantities.