



PLANETARY GEARBOX GPL042K

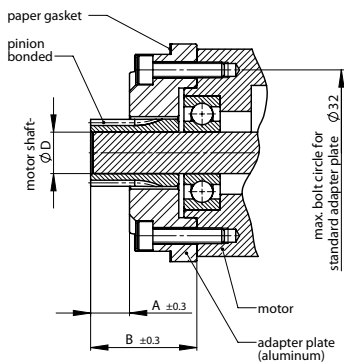

motor mounting

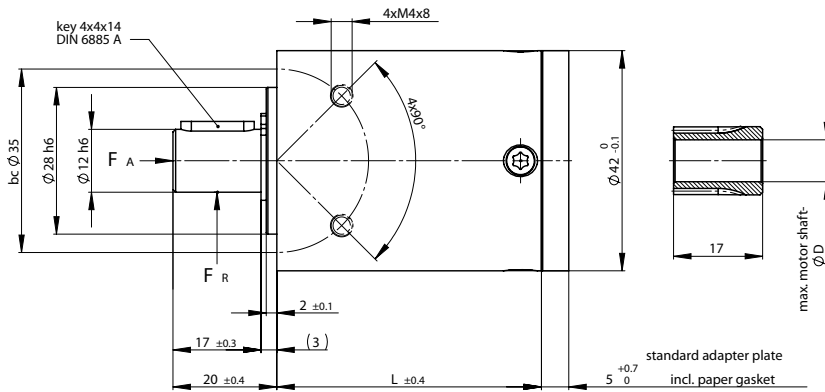

1-STAGE 2-STAGE 3-STAGE

Ratio i:1	Max. motor shaft-ØD	Ratio i:1	Max. motor shaft-ØD	Ratio i:1		Max. motor shaft-ØD
				49	56	
3.5	8	12.25	8	64	70	8
		14	8	80	100	8
		16	8	120	144	8
		20	8	184	235.11	8
		24	8	293.89	352.67	8
		25	6	450.63		8
		30	6			8
4	8	30.67	8			8
5	6	38.33	6			6
6	4	46	4			4
7.67	3	58.78	3			3

Standard scope of delivery Gearbox lubricated for duration of service life, dust-proof package, motor pinion, mounting screws, paper gasket and assembly instructions (adapter plate optional).

Customized versions also available for small quantities.

Stainless steel version on request.

Rated torque continuous	Type Standard	Type R	Nm	0.7	4	15
Rated torque intermittent	Type Standard	Type R	Nm	1.4	8	30
Rated torque continuous	Type V	Type S	Nm	1.4	8	15
Rated torque intermittent	Type V	Type S	Nm	3	15	30
Max. efficiency at rated torque			%	90	85	80
Average backlash at no load	Type Standard	Type V	arcmin ≤	20	35	50
Average backlash at no load	Type R		arcmin ≤	12	20	30
Average backlash at no load	Type S		arcmin ≤	8	12	15
Weight without adapter plate			g	315	400	485
Dimension L			mm	38	50.5	63
Dimension A			mm		7.5	
Dimension B			mm		20.5	
Max. radial load	F _R	8.5 mm from shaft end	N		250	
Max. axial load	F _A		N		200	
Max. continuous rated speed at drive			min ⁻¹		5000	
Max. intermittent rated speed at drive			min ⁻¹		8000	
Temperature range			°C		-25 / +90	