
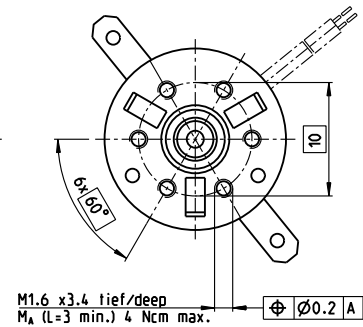
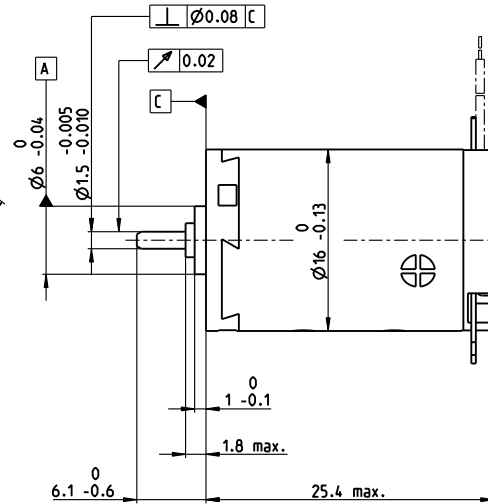


A-max 16 Ø16 mm, precious metal brushes CLL, 2 watt

Kabel AWG 26/7
cable UL Style 1061
Kabel rot
cable red

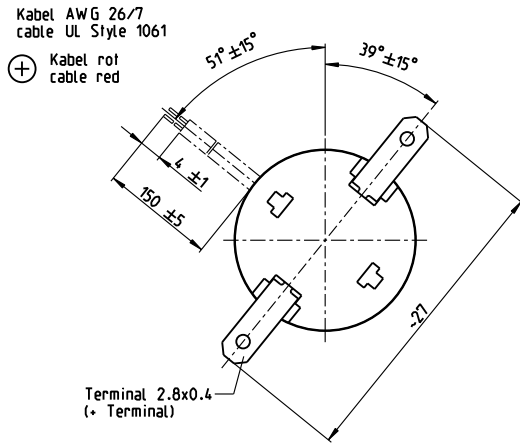

A-max

M 3:2

- Stock program
- Standard program
- Special program (on request)

Part Numbers

with terminals	110041	110042	110043	110044	110045	110046	110047	110048	110049	110050
with cables	139820	352815	134844	231379	220514	304672	352823	352816	260678	352817

Motor Data

Values at nominal voltage		V	1.5	3	6	9	12	15	18	21	24	30
1 Nominal voltage	V		1.5	3	6	9	12	15	18	21	24	30
2 No load speed	rpm		10800	11000	10100	12300	12300	13200	14100	13700	13800	11400
3 No load current	mA		61.4	38.1	13.9	12.7	9.54	8.57	7.99	6.53	5.83	3.37
4 Nominal speed	rpm		9360	8810	4530	6700	6660	7590	8480	8040	8120	5480
5 Nominal torque (max. continuous torque)	mNm		0.712	1.3	2.22	2.19	2.17	2.15	2.14	2.11	2.08	
6 Nominal current (max. continuous current)	A		0.6	0.6	0.408	0.327	0.243	0.209	0.185	0.153	0.134	0.0864
7 Stall torque	mNm		4.79	4.51	4.03	4.82	4.77	5.16	5.44	5.22	5.12	4.04
8 Stall current	A		3.66	1.97	0.723	0.702	0.52	0.482	0.453	0.362	0.315	0.164
9 Max. efficiency	%		76	75	75	76	76	76	76	76	76	74
Characteristics		Ω	0.41	1.52	8.3	12.8	23.1	31.1	39.7	57.9	76.2	183
10 Terminal resistance	Ω		0.41	1.52	8.3	12.8	23.1	31.1	39.7	57.9	76.2	183
11 Terminal inductance	mH		0.017	0.052	0.306	0.467	0.83	1.13	1.42	2.05	2.61	6.01
12 Torque constant	mNm/A		1.31	2.29	5.57	6.88	9.17	10.7	12	14.4	16.3	24.7
13 Speed constant	rpm/V		7290	4170	1720	1390	1040	893	795	663	587	387
14 Speed/torque gradient	rpm/mNm		2280	2770	2560	2590	2620	2600	2630	2670	2750	2880
15 Mechanical time constant	ms		25.3	23.8	23.2	23.3	23.3	23.4	23.5	23.4	23.5	23.9
16 Rotor inertia	gcm ²		1.06	0.82	0.868	0.859	0.849	0.859	0.852	0.838	0.816	0.793

Specifications

Thermal data	
17 Thermal resistance housing-ambient	29.8 K/W
18 Thermal resistance winding-housing	5.5 K/W
19 Thermal time constant winding	3.55 s
20 Thermal time constant motor	165 s
21 Ambient temperature	-30...+65°C
22 Max. winding temperature	+85°C

Mechanical data (sleeve bearings)	
23 Max. speed	19000 rpm
24 Axial play	0.05 - 0.15 mm
25 Radial play	0.012 mm
26 Max. axial load (dynamic)	0.8 N
27 Max. force for press fits (static)	35 N
28 Max. radial load, 5 mm from flange	1.4 N

Mechanical data (ball bearings)	
23 Max. speed	19000 rpm
24 Axial play	0.05 - 0.15 mm
25 Radial play	0.025 mm
26 Max. axial load (dynamic)	2.2 N
27 Max. force for press fits (static)	30 N
28 Max. radial load, 5 mm from flange	7.8 N


Other specifications	
29 Number of pole pairs	1
30 Number of commutator segments	7
31 Weight of motor	21 g
CLL = Capacitor Long Life	

Values listed in the table are nominal.
Explanation of the figures on page 82.

Option

- Ball bearings in place of sleeve bearings
- Without CLL

Operating Range

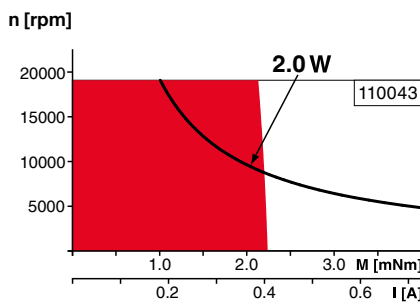

Comments

- Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- Assigned power rating**

maxon Modular System

Details on catalog page 38

Spur Gearhead

Ø16 mm

0.01-0.1 Nm

Page 375-378

Planetary Gearhead

Ø16 mm


0.1-0.6 Nm

Page 379/380

Screw Drive

Ø16 mm

Page 421-423



Recommended Electronics:

Notes	Page 38
ESCON Module 24/2	500
ESCON 36/2 DC	500